






ŠÍŘKA	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-	
Zásuvka uvnitř	257	357	457	557	Kombinace několika zásuvek											
Externí jednotka	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415				

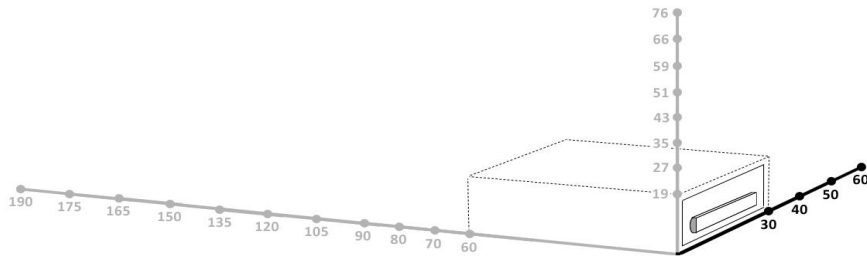

VÝŠKA	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Zásuvka uvnitř	117	196	275	354	432	511	590	669	Kombinace několika zásuvek						
Výška hliníkových zásuvek	86	86	188	188	330	330	330	330							
Výška hliníkové přepážky	76	76	178	178	320	320	320	320							
Externí jednotka	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

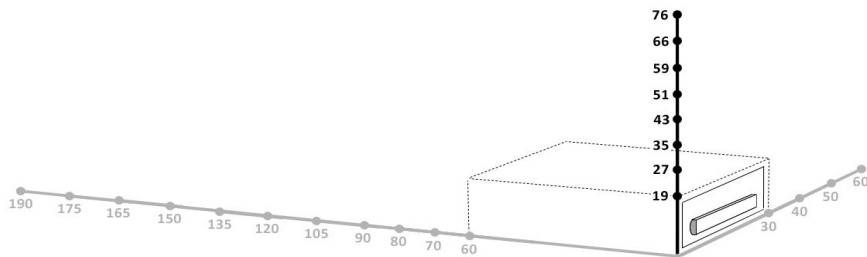


DEPTH	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Zásuvka uvnitř	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Procento otevření zásobníku (%)	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standardní oddíl	-	-	-	-	Při výrobě je namontována 1 přepážka ve vzdálenosti 431 mm od čela.										
Maximální nosnost na zásuvku	60 KG				100 KG										
Externí jednotka	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

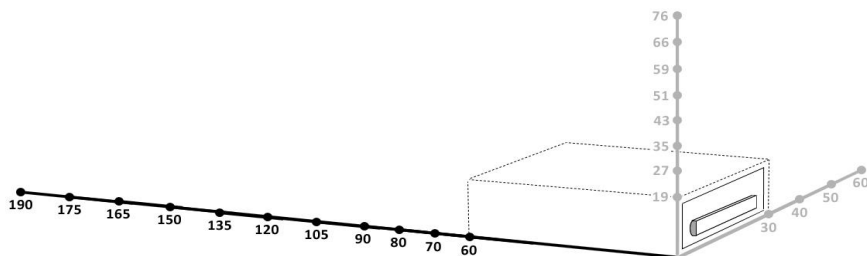




ŠÍŘKA	30	40	50	60	-	-	-	-	-	-	-	-	-
Otevřená přihrádka uvnitř	275	374	473	572									
Externí jednotka	315	415	515	615									

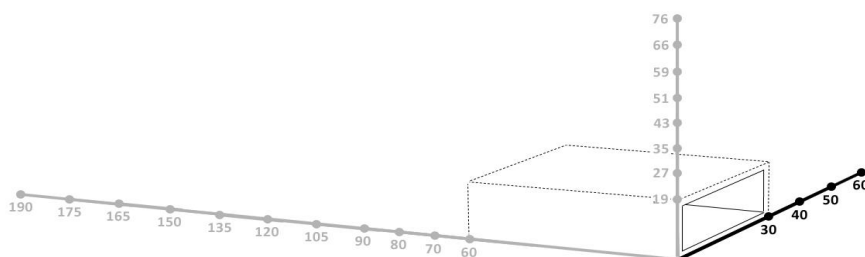

VÝŠKA	19	27	35	43	51	59	66	76	-	-	-	-	-
Otevřená přihrádka uvnitř	161	240	318	397	476	555	633	731					
Externí jednotka	191	270	348	427	506	585	663	761					

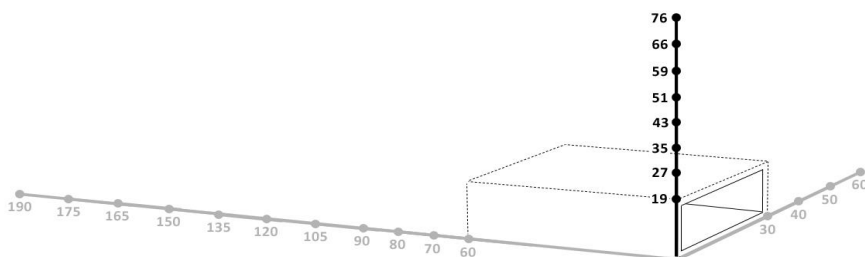

DEPTH	60	70	80	90	105	120	135	150	165	175	190	-	-	-
Otevřená přihrádka uvnitř	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855			
Externí jednotka	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871			

